

# Chassis Monitor

## Chassis Monitor



42"(16:9)


### Specifications




Model Name	W42L100-OML2HB
Viewable Size Image	42" (16:9)
Active Display Area(mm)	930.24 (H) x 523.26 (V)
Pixel Pitch(mm)	0.4845 x 0.4845
Number of Pixels	1920 x 1080
Contrast Ratio	4000:1(typ.)
Display Color	1073M
Brightness(cd/m )	700(typ.)
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Synchronization Range	31.5~91.1KHz / 50~85Hz
Horizontal/Vertical	
Recommended Resolution	1920 x 1080 @ 60Hz
Input Signal	1 x VGA In
	1 x DVI-D In
	1 x Component In (YPbPr)
	1 x HDMI In
	1 x Display Port In
	1 x RCA L/R In
	1 x Audio Jack In
	1 x LAN (For Remote Control)
	1 x RS232 In (For Remote Control)

Output Signal	1 x DVI-I Out
	1 x RCA L/R Out
	1 x RS232 out (For Remote Control)
Internal Speaker	10W + 10W
Power Source	AC100~240V, Universal, 10%
Operating Temperature	5~40degC
Operating Humidity	20~80% (without condensation)
Dimension(mm)	965.8(W) x 558.8(H) x 69.0(D)
VESA compatible arm mounting interface	200 x 200 mm/ 400 x 200mm

### Mechanical Drawing

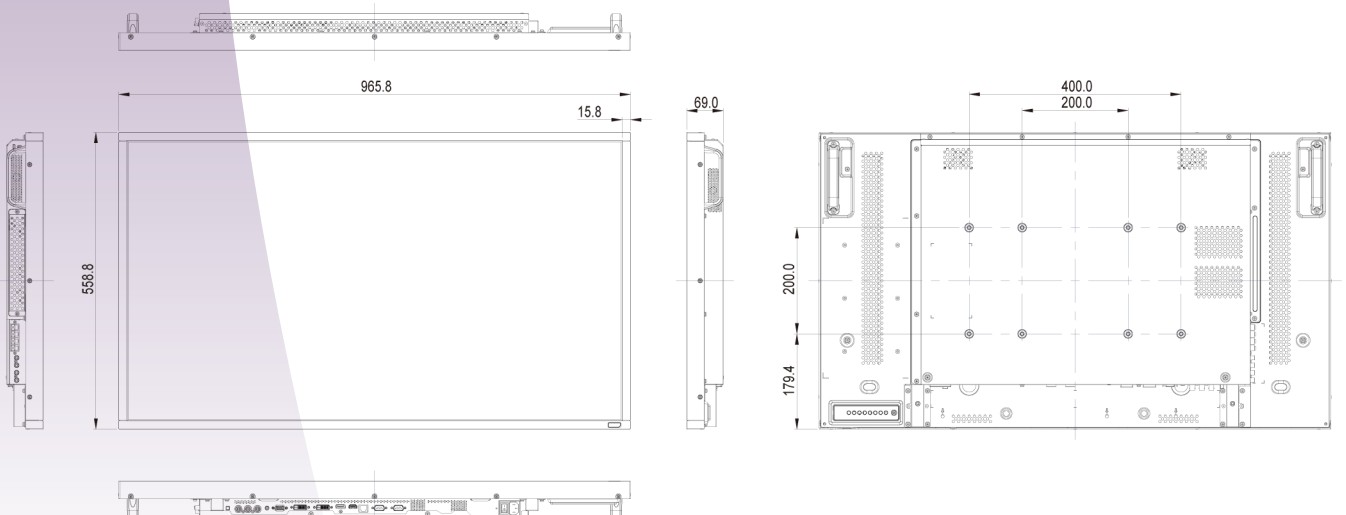

## Chassis Monitor

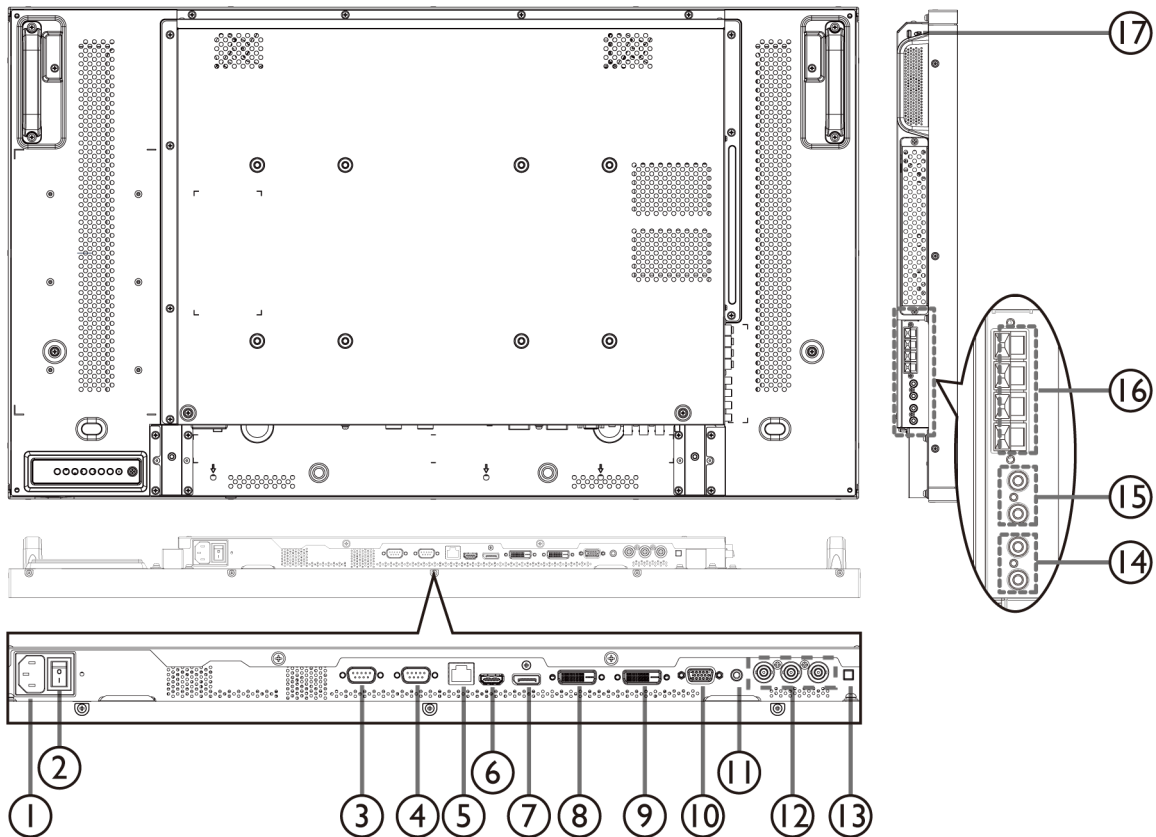

- ① **AC IN**  
AC power input from the wall outlet.
- ② **MAIN POWER SWITCH**  
Switch the main power on/off.
- ③ **RS232C OUT**  
RS232C network output for the loop-through function.
- ④ **RS232C IN**  
RS232C network input for the loop-through function.
- ⑤ **RJ-45**  
LAN port connection from your OPS device.
- ⑥ **HDMI IN**  
HDMI video/audio input.
- ⑦ **DisplayPort**  
DisplayPort video input.
- ⑧ **DVI IN**  
DVI-D video input.
- ⑨ **DVI OUT / VGA OUT**  
DVI or VGA video output.
- ⑩ **VGA IN (D-Sub)**  
VGA video input.
- ⑪ **VGA AUDIO IN**  
Audio input for VGA source (3.5mm stereo phone).
- ⑫ **COMPONENT IN (BNC)**  
Component YPbPr video source input.
- ⑬ **SPEAKER SWITCH**  
Internal speaker on/off switch.
- ⑭ **AUDIO IN**  
Audio input from external AV device (RCA).
- ⑮ **AUDIO OUT (RCA)**  
Audio output from the AUDIO IN jack to an external AV device.
- ⑯ **SPEAKERS OUT**  
External speakers output.
- ⑰ **KENSINGTON LOCK**  
Used for security and theft prevention.