

# Open Frame LCD

## Open Frame LCD


55"(16:9)

### Specifications




Model Name	W55L100-OFL2
Panel Size	55"(16:9)
Active Display Area(mm)	1209.6 (H) x 680.4 (V)
Resolution	1920 x 1080
Contrast Ratio	4000:1(typ.)
Display Color	16.7M
Brightness(cd/m <sup>2</sup> )	500(typ.)
Viewing Angle(CR>=10)	-89~89(H); -89~89(V)
Standard Input Signal	1 x Mini D-sub 15pin In 1 x DVI In 1 x DVI-I Out (with OPS module) 1 x Component In (YPbPr) 1 x HDMI In 1 x Display port In 1 x RCA L/R In 1 x RCA L/R Out (with OPS module) 1 x Audio Jack In 1 x RS232 In (for control usage) 1 x RS232 Out (for control usage) 1 x LAN (for control usage)
Accessories	Power code VGA cable
Power Input	100 to 240V AC in, with external AC to DC Adapter
Power Consumption	145W typical , normal operation
Operating temperature	0~50°C
Storage Temperature	-10~60°C

### Mechanical Drawing

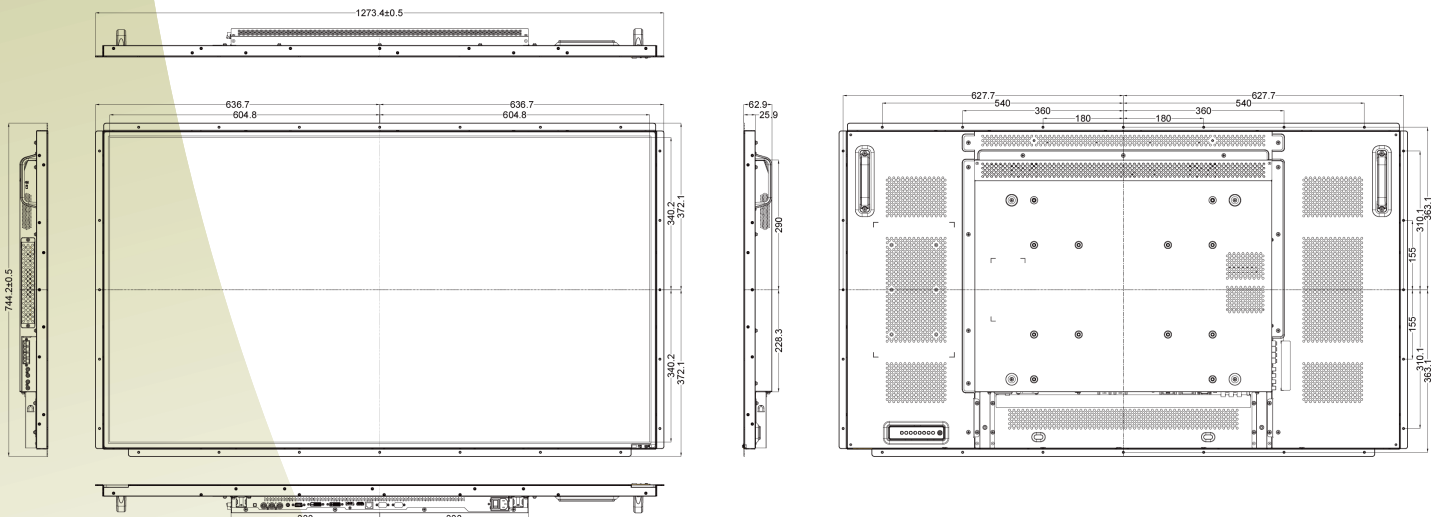

# Open Frame LCD

## Open Frame LCD

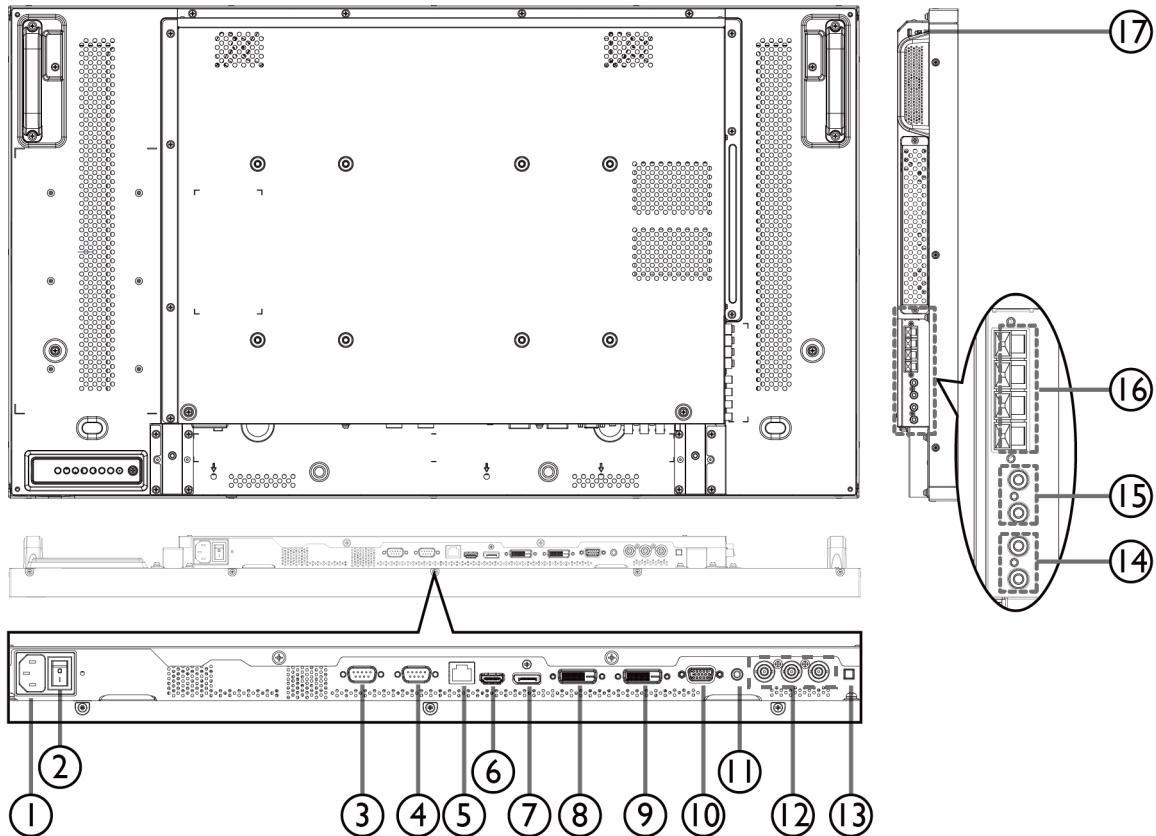

- ① **AC IN**  
AC power input from the wall outlet.
- ② **MAIN POWER SWITCH**  
Switch the main power on/off.
- ③ **RS232C OUT**  
RS232C network output for the loop-through function.
- ④ **RS232C IN**  
RS232C network input for the loop-through function.
- ⑤ **RJ-45**  
LAN port connection from your OPS device.
- ⑥ **HDMI IN**  
HDMI video/audio input.
- ⑦ **DisplayPort**  
DisplayPort video input.
- ⑧ **DVI IN**  
DVI-D video input.
- ⑨ **DVI OUT / VGA OUT**  
DVI or VGA video output.
- ⑩ **VGA IN (D-Sub)**  
VGA video input.
- ⑪ **VGA AUDIO IN**  
Audio input for VGA source (3.5mm stereo phone).
- ⑫ **COMPONENT IN (BNC)**  
Component YPbPr video source input.
- ⑬ **SPEAKER SWITCH**  
Internal speaker on/off switch.
- ⑭ **AUDIO IN**  
Audio input from external AV device (RCA).
- ⑮ **AUDIO OUT (RCA)**  
Audio output from the AUDIO IN jack to an external AV device.
- ⑯ **SPEAKERS OUT**  
External speakers output.
- ⑰ **KENSINGTON LOCK**  
Used for security and theft prevention.