


Panel Mount High Brightness Display

15"

Specifications



| | |
|--------------------------------|---|
| Model Name | R15L100-PMA1HB |
| Panel Size | 15" |
| Active Display Area(mm) | 304.1(H)x228.1(V) |
| Resolution | 1024x768 |
| Brightness(cd/m ²) | 1500 (Typical) |
| Contrast Ratio | 700:1 (Typical) |
| Viewing Angles(CR>=10) | -80~80(H) ; -70~70(V) |
| Display Colors | 16.2M (6 bits/color) |
| Standard Input Signal | 1 x VGA (D-sub 15) 1 x HDMI (Type-A) |
| Touch Screen(Optional-1) | Resistive Touch Protective Glass |
| Touch Screen(Optional-2)* | SAW Touch (Surface Acoustic Wave) |
| Touch Interface | USB / RS232 |
| Audio / Speakers (Optional)* | Audio line in (3.5mm) + Speaker x2 |
| OSD | 5 Keys: -, +, Power, Esc, Enter |
| Power Input | 12V DC input (2.5ψ) with external AC-DC Adapter (100V~240V) |
| Power Consumption | 22W typical, Normal operation |
| Operating temperature | 0~50°C |
| Storage Temperature | -10~60°C |
| Accessories | Power AC-DC Adapter(100V~240V) VGA cable (1.8m) HDMI cable (2m) |

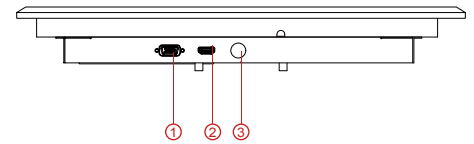


1. VGA
2. HDMI
3. DC Input

| I/O Optional | |
|--------------|---|
| Optional 1* | 1 x VGA (D-sub 15) 1 x HDMI (Type-A) 1 x DVI-D |
| Optional 2* | 1 x VGA (D-sub 15) 1 x DVI-D 1 x S-Video 1 x Composite |

*Outside dimension and I/O will be different from standard

Mechanical Drawing: R15L100-PMA3HB (With Resistive)

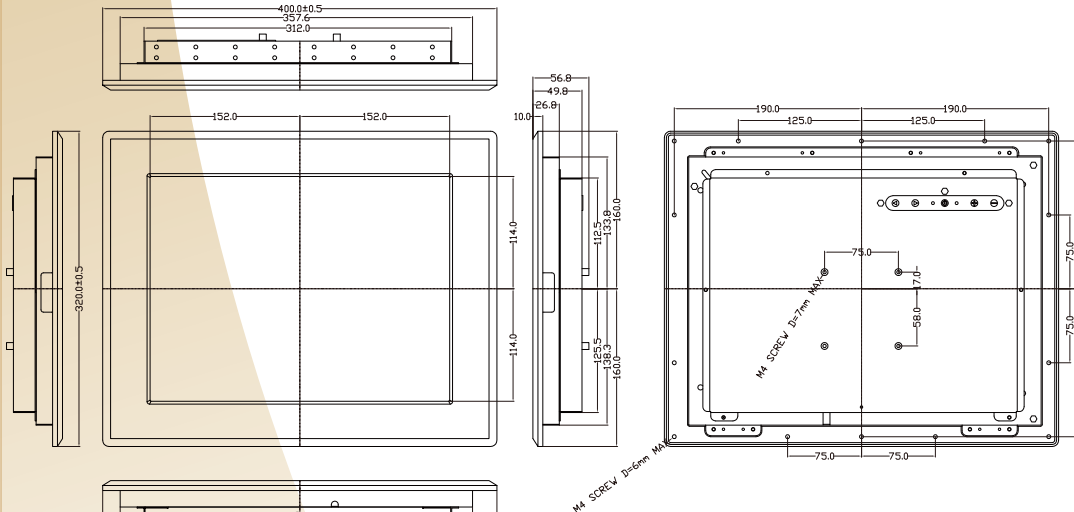

UNIT:mm

* Note: The mechanical drawing may change when adding touch screen. Please contact our sales representative if you need further product information.