10 Console Drawer


1U Console Drawer

IU Console LCD Drawer or Switch can save space, power and money. It only takes IU (1.75in), same height as the rack space. It is an ideal solution for ASP, ISP, telecommunication companies, and testing rooms.

*All specification

What is KVM?

KVM is the acronym for keyboard,Video, Mouse. More specifically, multiple computers are connected to the KVM and controlled from a single set of keyboard, monitor and mouse. Although there are multiple computers connected the KVM, however only one can be controlled at a time. Control of each computer is done separately via the use of switches on the KVM. It does this by fooling each computer into thinking that it is currently actively connected to a separate keyboard, mouse and monitor. Since the KVM incorporates only a single set of keyboard, monitor and mouse, it saves space, cuts cost as well as increase the efficiency of work done. Along with the ease of control, it saves time and adds valuable flexibility to the whole system.



19" LDS410D-16P




Display Area(mm) 376.3(H)x301.1(V) Pixel Pitch 0.294(H)x0.294(V) Number of Pixels 1280(H)x1024(V) Contrast Ratio 500:1 Display Color 16.7M Brightness(CD/m²) 250(typ.) Viewing Angle -85~85(H);-85~85(V) I/O Power:12V DC in with AC adapter Keyboard:USB Keyboard:USB	Specifications	2011/65/EU
Number of Pixels1280(H)x1024(V)Contrast Ratio500:1Display Color16.7MBrightness(CD/m²)250(typ.)Viewing Angle-85~85(H);-85~85(V)I/OPower:12V DC in with AC adapter	Display Area(mm)	376.3(H)x301.1(V)
Contrast Ratio500:1Display Color16.7MBrightness(CD/m²)250(typ.)Viewing Angle-85~85(H);-85~85(V)I/OPower:12V DC in with AC adapter	Pixel Pitch	0.294(H)x0.294(V)
Display Color16.7MBrightness(CD/m²)250(typ.)Viewing Angle-85~85(H);-85~85(V)I/OPower:12V DC in with AC adapter	Number of Pixels	1280(H)x1024(V)
Brightness(CD/m²) 250(typ.) Viewing Angle -85~85(H);-85~85(V) I/O Power:12V DC in with AC adapter	Contrast Ratio	500:1
Viewing Angle -85~85(H);-85~85(V) I/O Power:12V DC in with AC adapter	Display Color	16.7M
I/O Power:12V DC in with AC adapter	Brightness(CD/m²)	250(typ.)
	Viewing Angle	-85~85(H);-85~85(V)
Keyboard:USB	I/O	Power:12V DC in with AC adapter
		Keyboard:USB
Mouse:USB		Mouse:USB
VGA: 15-pin D-Sub		VGA: 15-pin D-Sub
Keyboard and Key Pad 88-Key keyboard and integrated Touch Pad	Keyboard and Key Pad	88-Key keyboard and integrated Touch Pad
17-Key numerical key pad		17-Key numerical key pad
Power Consumption 35 Watts	Power Consumption	35 Watts
Power Supply AC 100-240V Universal	Power Supply	AC 100-240V Universal
On-Screen Display Contrast, Brightness, H/V Position, H/V Size	On-Screen Display	Contrast, Brightness, H/V Position, H/V Size
H-scaling,Auto-adjust,Color Temp.(9300,6500,		H-scaling,Auto-adjust,Color Temp.(9300,6500,
User),Red-Gain,Blue-Gain,Green-Gain,Gamma,		User),Red-Gain,Blue-Gain,Green-Gain,Gamma,
Recall,Phase,OSD & Exit		Recall,Phase,OSD & Exit
Hot Key Control OSD Hot Key	Hot Key Control	OSD Hot Key
Environmental Consideration Operating temperature:0°C~50°C (32F~122F)	Environmental Consideration	Operating temperature:0°C~50°C (32F~122F)
Storage temperature:-20°C~60°C (-4F~140F)		Storage temperature:-20°C~60°C (-4F~140F)
Humidity 10~85% in operating;10-90% in storage	Humidity	10~85% in operating;10-90% in storage
Size 609mm(D) x482mm(W) x44mm(H)	Size	609mm(D) x482mm(W) x44mm(H)

10 Console Drawer

1U Console Drawer

Mechanical Drawing

MODEL NAME: LDS410D-16P

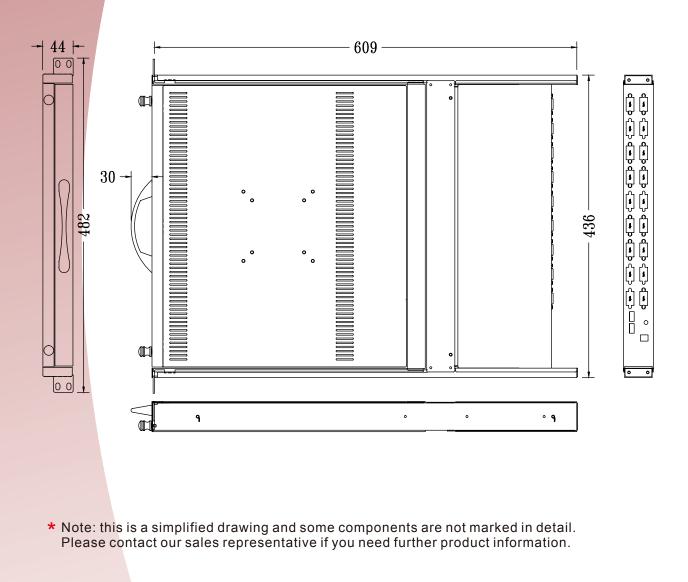

Order Information

	19"
KVM 16 Port	LDS410D-16P

* Note: Please contact our sales representative for detail information.