


R15IK7T-OFC3


15" Panel PC (Intel 7th Generation Core i3/i5/i7 Processor)

Mechanical Design

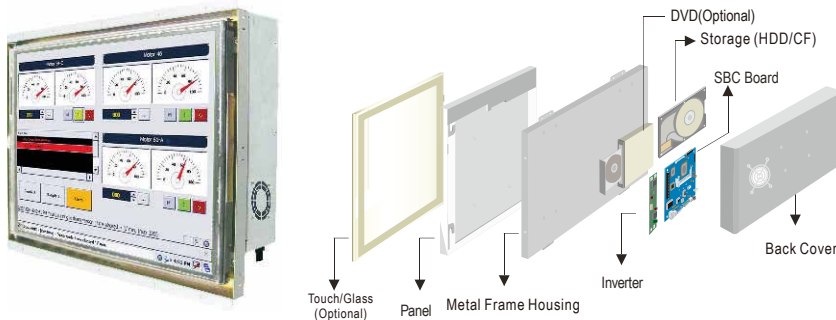


Open Frame

Modularized Construction
Dimensions

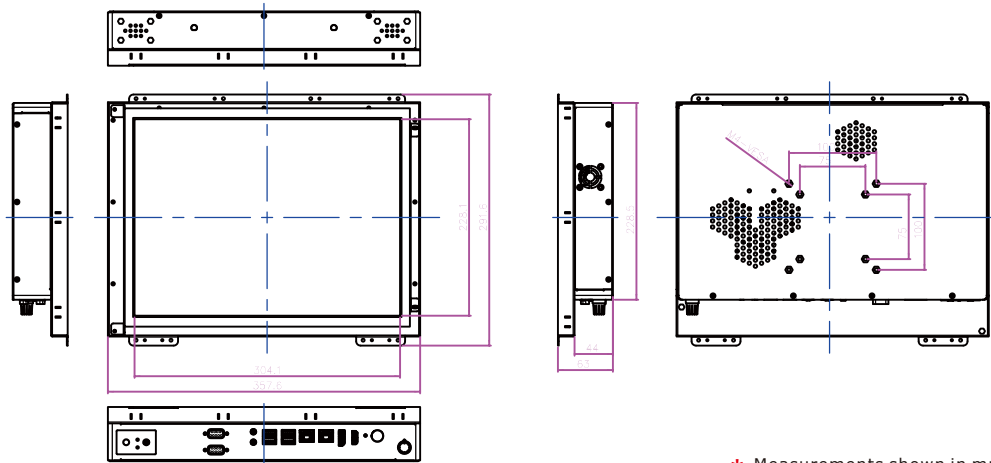

Features:

- 15" 1024 x 768 Resolution
- Intel 7th Generation Core i3/i5/i7 processor (Kabylake)
- Flexible storage devices, one 2.5-inch HDD and one SSD
- Multiple I/Os, Two Serial Ports and Four USB 3.0 Ports
- 12V DC Power input
- DP Support 4096x2304@60Hz
- HDMI Support 4096x2304@24Hz

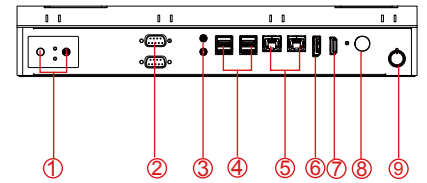

1. Power On Button/
Power Rest Button
2. 2 x RS232/422/485
3. Mic In/Line Out
4. 4 x USB3.0
5. 2 x RJ45
(10/100/1000 Mbps)
6. DP 1.2
7. HDMI 1.4
8. 12V DC in
9. Brightness Adjustment
Knob

- * Measurements shown in mm
- * Tolerance of all dimensions is shown as follow 0~30 mm ± 0.1 mm, 30~50 mm ± 0.15 mm, 50~120 mm ± 0.2 mm, above 120 mm ± 0.25 mm
- * Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Specifications

System	
Processor	: Intel® Core™ i7-7700T Processor, 2.9 GHz Intel® Core™ i5-7500T Processor, 2.7 GHz Intel® Core™ i3-7100T Processor, 3.4 GHz
System Chipset	: Intel® 8 series Chipset(C236)
System Memory	: 2 x SODIMM, Max 32GB DDR4 2400 MHz, default 4GB
Storage	: 1 x M.2 SSD, Max 256GB 1 x 2.5" 500GB HDD (default)
LAN	: Intel® Ethernet Controller I211-AT + Intel® Gigabit Ethernet PHY I219-LM
Audio Codec	: Realtek ALC283 HD Audio Codec

Panel Spec	
Size/Type	:15" TFT
Resolution	:1024x768
Brightness	:250 nits (Optional 400 nits)
Contrast Ratio	:500:1 (typ.)
Viewing Angles	:-70~70 (H); -60~60 (V)
Max Colors	:16.2M (6bits+FRC)

Input / Output	
Serial Port	: 2 x RS232/422/485(default RS232)
Ethernet	: 2 x RJ45-10/100/1000 Mbps
USB Port	: 4 x USB 3.0
DP Port	: 1 x DP 1.2
HDMI Port	: 1 x HDMI 1.4
Audio	: Mic in, Line out

Environment Considerations	
Operating Temperature	: 0°C to 50°C
Operating Humidity	: 10% to 90% (non condensing)

Power Specifications	
Power Input	: 12V DC IN (Lockable Power Jack)
Power Consumption	: 58W (typ.)(Max.backlight & high CPU load)

Security Support	
• Trusted Platform Module (TPM 2.0)	

Accessories	
External Adapter	: 110~240V Ac-in Power Adapter

Order Options	
Mechanical :Open Frame	Storage :2.5" HDD/ M.2 SSD
Touch :5-Wires Resistive(Default) AR Glass(Optional)	RAM :SODIMM DDR4
Panel : 1000cd/m ² (Optional)	OS : Windows 10 IoT Enterprise
	Power : 9~36V DC in(Optional)

Expansion Slot	
• 2 x M.2 (1 for WiFi, 1 for SSD), 1 x PCIe x16	
*Customized housing required if you need to have the PCIe expansion	