

Panel Mount LCD


8.4"

Specifications



Model Name	R08L200-PPU1
Panel Size	8.4"
Active Display Area(mm)	170.4(H)x127.8(V)
Resolution	800x600
Brightness(cd/m2)	600(Typical)
Contrast Ratio	600:1 (Typical)
Viewing Angles(CR>=10 L/R/U/D)	-75~75(H) ; -60~70(V)
Display Colors	262K
Standard Input Signal	1 x VGA (D-sub 15) 1 x HDMI (Type-A)
Touch Screen	Projected Capacitive
Touch Interface	USB
Audio / Speakers (Optional)*	Audio line in (3.5mm) + Speaker x2
OSD	5 Keys: -, +, Power, Esc, Enter
Power Input	12V DC input (2.5ψ) with external AC-DC Adapter (100V~240V)
Power Consumption	15W typical, Normal operation
Operating temperature	0~50°C
Storage Temperature	-10~60°C
Accessories	Power AC-DC Adapter(100V~240V) VGA cable (1.8m) HDMI cable (2m)


*Outside dimension and I/O will be different from standard

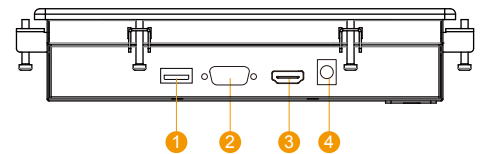

1. Touch
2. VGA
3. HDMI
4. DC input

I/O Optional	
Optional 1*	1 x VGA (D-sub 15) 1 x HDMI (Type-A) 1 x DVI-D
Optional 2*	1 x VGA (D-sub 15) 1 x DVI-D 1 x S-Video 1 x Composite

Mechanical Drawing

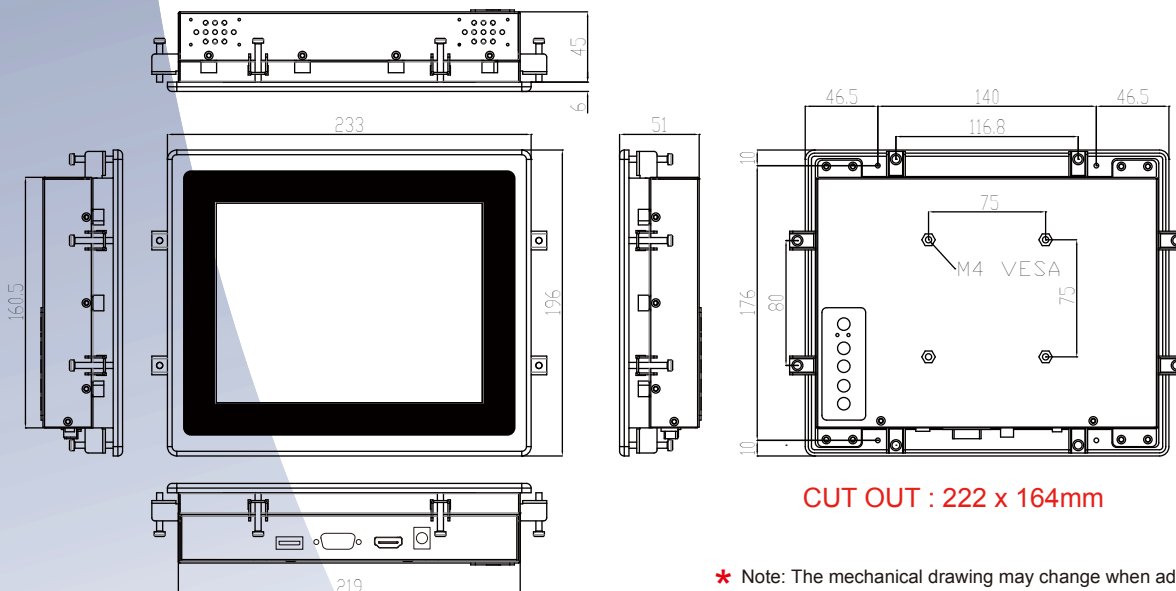

CUT OUT : 222 x 164mm

* Note: The mechanical drawing may change when adding touch screen. Please contact our sales representative if you need further product information.