


# Bar-type Chassis Monitor

## Bar-Type Chassis Monitor

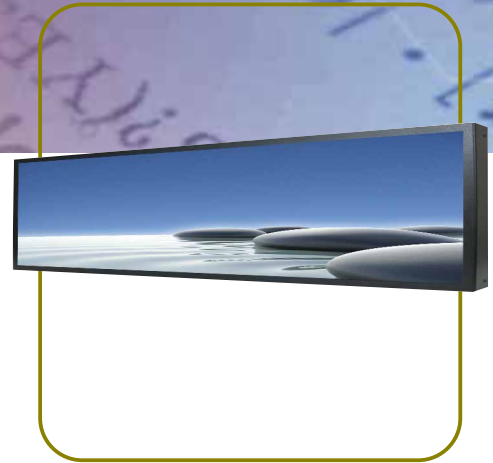

38"

### Specifications




Model Name	W38L100-CHA1
Viewable Size	38"
Active Display Area(mm)	904.32(H) x 254.34(V)
Pixel Pitch(mm)	0.47(H) x 0.47(V)
Number of Pixels	1920x540
Contrast Ratio	4000:1(typ.)
Number of Colors	1.07B
Brightness(cd/m <sup>2</sup> )	1000(typ.)
Viewing Angle(CR>=10)	-89~89 (H);-89~89 (V)
Synchronization Range	31.5~60.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1920x540@ 60Hz
Power Source	24V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	75W typical,normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
VGA Input	Yes
DVI Input	Yes(DVI-D Single link)
HDMI Input	Yes

### Accessories

VGA cable	D-sub 15 pin male to male	✓
DVI cable	24 pin male to male	✓
HDMI cable	19 pin male to male	✓
User Manual	User guide	✓
User adapter	24 V power adapter	✓

### Mechanical Drawing:W38L100-CHA1

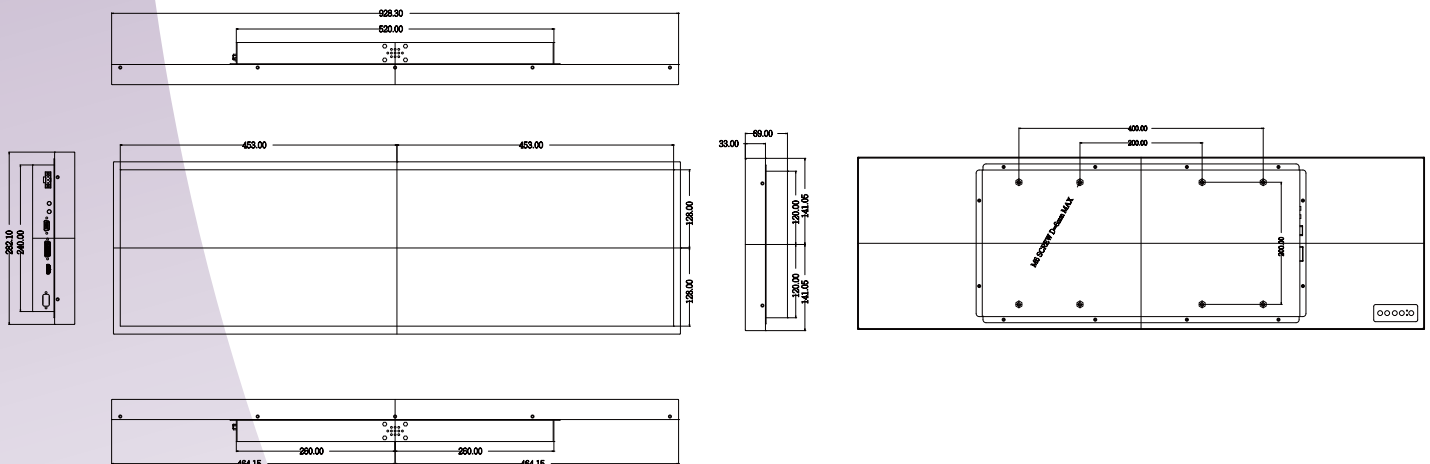

UNIT:mm

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.